


STATE	PROJECT NUMBER	SHEET NO.	TOTAL SHEETS
GA.	NHS-M000-00(438)	66	·

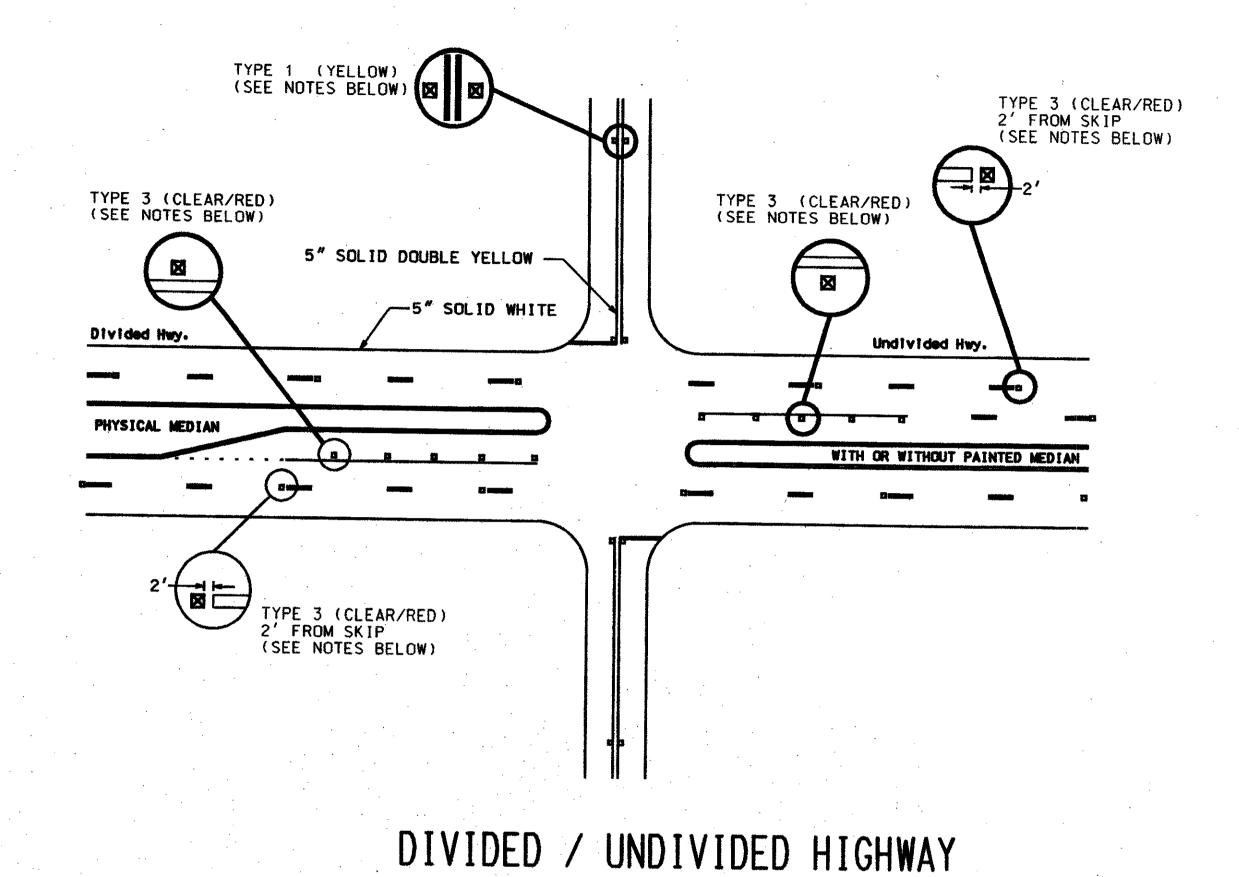


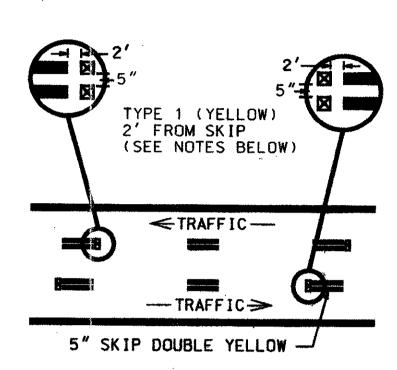


REVERSIBLE LANE

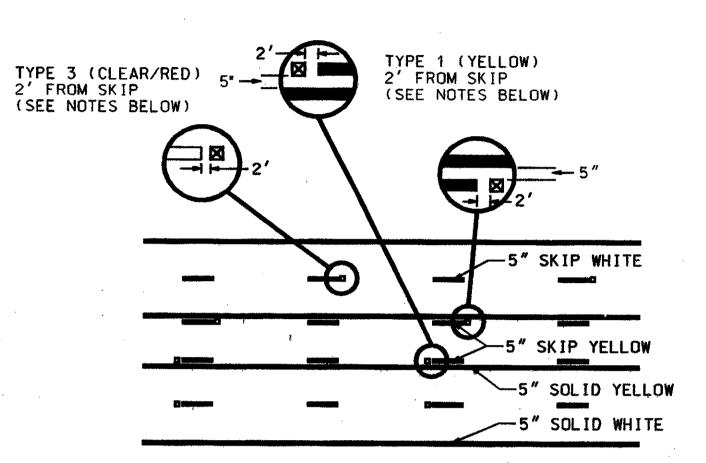

TWO WAY LEFT TURN LANE

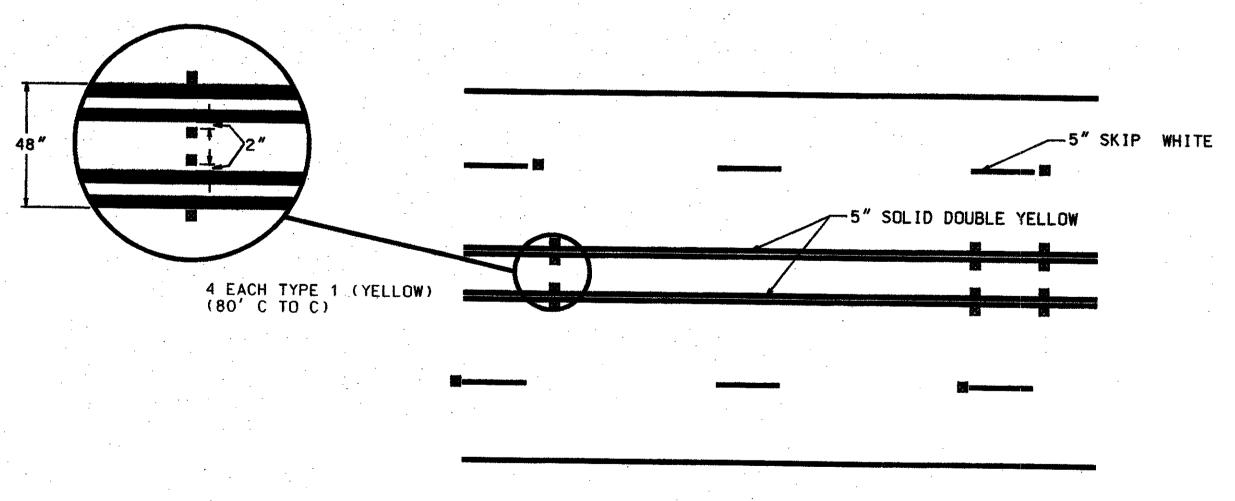

4'-0" STRIPED FLUSH MEDIAN

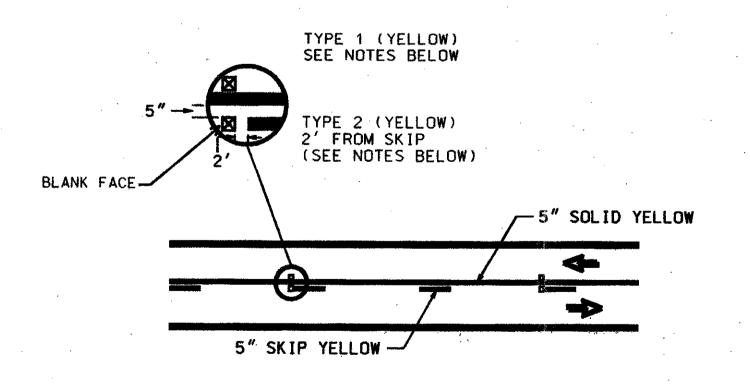

NO PASSING ZONE

## GENERAL NOTES:

- 1. RAISED PAVEMENT MARKERS SHALL BE SPACED EVERY 80 FT UNLESS OTHERWISE SPECIFIED.
- 2. ON SOLID WHITE TURN BAY LINES, SPACING SHALL BE 20 FT.
- 3. RAISED PAVEMENT MARKERS SHALL BE OFFSET 5 INCHES FROM SOLID LANE LINES.
- 4. CLEAR FACE OF TYPE 3 RAISED PAVEMENT MARKERS SHALL BE ORIENTED TOWARD ONCOMING TRAFFIC.
- 5. ON HORIZONTAL CURVES WHERE AT LEAST 3 MARKERS CANNOT BE SEEN AT ONE TIME USING NORMAL SPACING. MARKERS SHALL BE PLACED 40 FT.

DATE	REVISIONS	GEORGIA DEPARTMENT OF TRANSPORTATION			
		OFFICE OF TRAFFIC			
		DETAIL	.s of		
·		RAISED PAVEMENT	AISED PAVEMENT MARKER LOCATION		
		NON-LIMITED ACCESS ROADWAY			
		NO SCALE	JANUARY 2000		